

## FAD 68 Wall Wash

FAD 68 Wall Wash 3000K 21W

PRODUCT NUMBER -

1.FA006.D1.O2-000.930.08.HE.G1

PROJECT NAME -

### PRODUCT DATASHEET

#### PRODUCT OVERVIEW

|             |  |
|-------------|--|
| Application | Office, Retail, Residential, Leisure, Hospitality & Healthcare   |
| Description | Architectural recessed downlight, available in a range of sizes, in square, round and with a trimless option. Adjustable and fixed reflectors are interchangeable and available in any RAL colour. Lenses include narrow, medium, wide, and wall wash. Escapeform 1 provides emergency output. |

#### PHYSICAL PROPERTIES




|                        |                                 |
|------------------------|---------------------------------|
| Dimensions (mm) W x H: | Ø77 x 100                       |
| Cut out (mm)           | Ø68                             |
| Weight (kg)            | 0.43                            |
| Material               | Diffuser: PMMA, Body: Aluminium |
| Colour                 | Matt                            |
| Fixing type            | Recessed spring clips           |
| IP rating              | IP20                            |

#### PHOTOMETRIC PROPERTIES

|                              |                 |
|------------------------------|-----------------|
| Optic                        | Opal            |
| Output mode                  | High Efficiency |
| Beam angle (°)               | Wall Wash       |
| Colour temperature (K)       | 3000            |
| Colour Rendering Index (CRI) | >90             |
| Direct lumen output (lm)     | 1100            |
| Wattage (W)                  | 21.0            |
| Efficacy (lm/W)              | 52              |

#### ELECTRICAL PROPERTIES

|                         |                                    |
|-------------------------|------------------------------------|
| Supply voltage (V)      | 220-240                            |
| Supply frequency (Hz)   | 0 / 50 / 60                        |
| Current (mA)            | 500                                |
| Control                 | Non Dim, Phase Dim, 1-10V and DALI |
| Safety class            | II                                 |
| LED Life (L70B50) (hrs) | 83000                              |

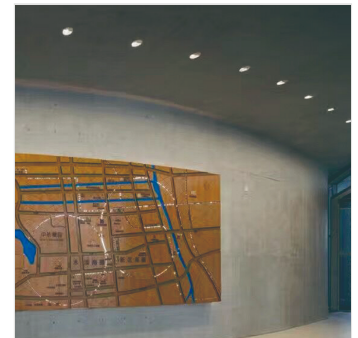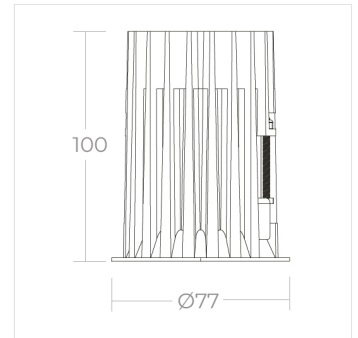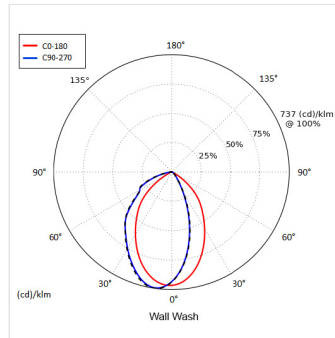

#### Terms and Conditions

© 2024 Formation Lighting. All rights reserved. The information in this datasheet is for informational purposes only and may change without notice. Technical data are rated for 25°C ambient temperature with a tolerance of +/- 10% for luminous flux and +/- 150 K for colour temperature. The UGR is calculated from a room with 4H/8H dimensions and reflectance of 20% floor, 50% walls, and 70% ceiling using the SHR 1:1. Use of this datasheet is subject to our terms and conditions, available at [formationlighting.com](http://formationlighting.com)